

Forza **FX Series** is designed for power protection for your personal computer, server or home theater. The compact size is specially designed for limited office and home working space.

FEATURES


- LCD displays real time status information
- Easy to read LCD visual display with bright blue back light
- Power protection for home and office equipment
- Boost & buck AVR to stabilize voltage
- 8 outlets – w/surge protection, battery back up, AVR (6), and surge protection only (2)
- Network, Fax & modem protection and surge protection (RJ-45)
- USB communication port
- Long back up time
- Power management software CD
- 660 Joules surge rating
- Coaxial protection

Designed for
Home Theater / Server & Network




LCD DISPLAY

The Forza **FX-1500LCD** comes equipped with an easy to read LCD and a blue backlight that displays the battery status, input voltage, output voltage, and operation mode of the UPS.

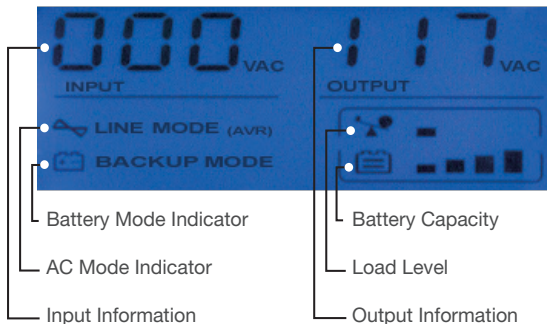


POWER PROTECTION

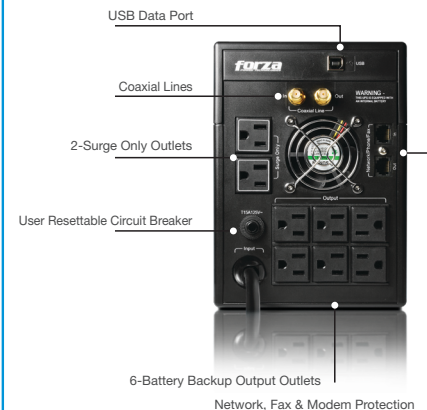

POWER MANAGEMENT VIA DATA REPORT

- Real Time Monitoring
- Compatible with Windows Vista/XP/ME/2000/98/95, Linux, Mac OS, Unix, Sun Solaris, IBM AIX, HP-UX
- Multi Language interface
- Power flow display for monitoring UPS status
- Scheduled system shutdown/restart
- UPS Parameter setting
- Scheduled UPS test
- Warning notification via E-mail/Pager/Broadcast
- Password security protection

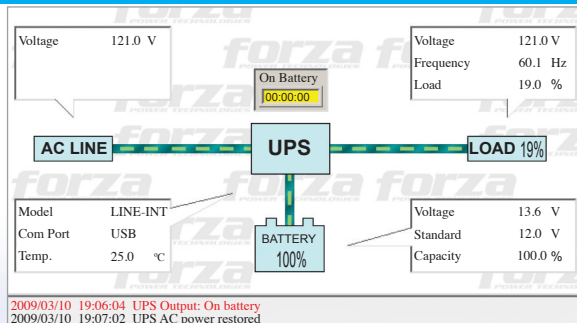

CONNECTIONS

FX-1500LCD
FX-1500LCD-U

Input	
Output	

MODEL	FEATURES	FX1500LCD	/	FX1500LCD-U
CAPACITY	VA / W	1500VA/840W		1500VA/840W
INPUT	Voltage Range	89-145VAC		166VAC/110VAC
	Frequency	50/60Hz		
	Voltage	110/120VAC		220/230/240VAC
OUTPUT	Voltage Regulation	+ / - 10% (battery mode)		
	Frequency	50Hz / 60Hz		
	Frequency Regulation	+ / - 1 Hz (battery mode)		
	Waveform	Stepped Sine-wave		
BATTERY	Battery Type	12/9Ah x 2pcs		
	Back up time with basic PC load	45 min*		
	Recharge Time	6 hours to 90% after complete discharge		
TRANSFER TIME	Typical	4-8ms (Typical)		
INDICATOR	LCD Screen	The LCD will always turn on even when the UPS is functioning. Including in charging mode or fault mode.		
AUDIBLE ALARM	Back up Mode	Beeps every 10 seconds		
	Low Battery	Beeps every 1 second		
	Overload	Beeps every 0.5 seconds		
	Battery Replacement	Beeps every 2 seconds		
	Fault	Beeps continuously		
PROTECTION	Complete Protection	Discharge, Overcharge, Shortcircuit, and Overload Protection		
PHYSICAL	Dimension (DxWxH) (mm)	405 x 205 x 145		
WEIGHT	Net Weight	9.7 Kg. / 21.4 Lbs		
ENVIRONMENT	Operating Environment	0 – 40°C, 0 – 90 % relative humidity (non-condensing)		
	Noise Level	Less than 45dB		
INTERFACE	USB	Windows family and Mac		
WARRANTY		Two Years		

*Calculated with a PC and 15" LCD monitor

